


BAKEWARE

Professional Spray



ILAG
swiss quality coatings



My demand: highest quality




ILAFLOX Resist SP-1000

Ceramic-reinforced two-coat system.
Depending on the substrate the baking dish is pretreated, the coating is sprayed on and cured at 280 - 300 °C (536 - 572 °F).

This coating has proven its value in extreme testing procedures that include endless baking cycles with our standard cake batter. Without the use of grease, oil or butter in the baking dish!
Very good abrasion resistance and non-stick properties characterize this system.

Basis	pure silicon
Number of layers	2
Coating thickness µm [mils]	25 - 35 [0.98 – 1.38]
Curing temperature °C [F]	280 - 300 [536 - 572]
Professional	■
Roasters	■
Bakeware	■ ■
Non-stick	* * * * *
Scratch resistance	* * *
Abrasion (BS)	* * * * *
Corrosion resistance	* * * * *
Stain resistance	* * * * *

■ highly recommended ■ conditionally recommended

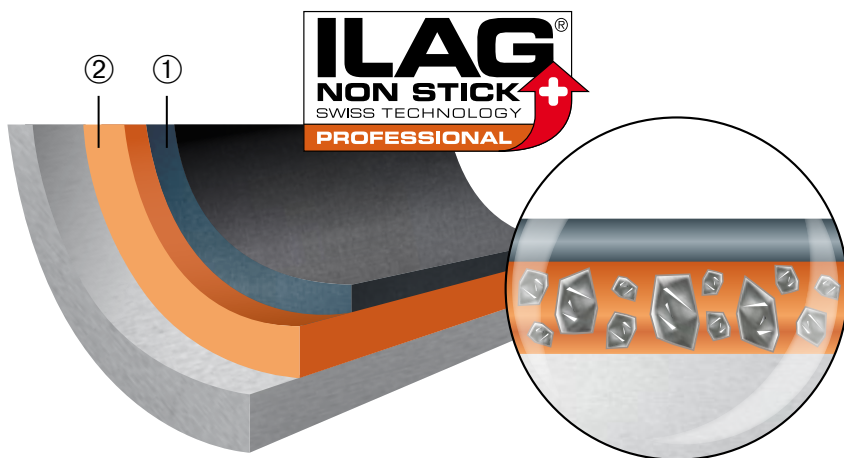


ILAFLOX Resist SP-1000

- ① Top Coat with high resistant surface hardness
- ② Ceramic reinforced Base Coat



www.ilag.ch/1800

 ILAG coatings applied in the right way can be used for food contact materials according to the European legislation.



ILAG – CHINA
 ILAG – HONGKONG
 ILAG – IBERIA
 ILAG – INDIA
 ILAG – IRAN

ILAG – SOUTH KOREA
 ILAG – SOUTH AMERICA
 ILAG – SOUTH EAST ASIA
 ILAG – TURKEY
 ILAG – USA

For detailed information please refer to our website:

www.ilag.ch



Industrielack AG
 Wangen (Switzerland)
 e-mail: info@ilag.ch

Tel.: +41 55 451 29 29
 Fax: +41 55 451 29 99



ILAG High Performance Coatings (Shanghai) Co. Ltd.
 Shanghai (P.R.China)
 e-mail: info@ilag.com.cn

Tel.: +86 21 5165 13 82
 Fax: +86 21 5165 13 89



ILAG USA Inc.
 St. John, Indiana (USA)
 e-mail: info@ilag.ch

Tel.: +1 219 713 45 97
 Fax: +1 219 558 07 38

A LOOSER Group company